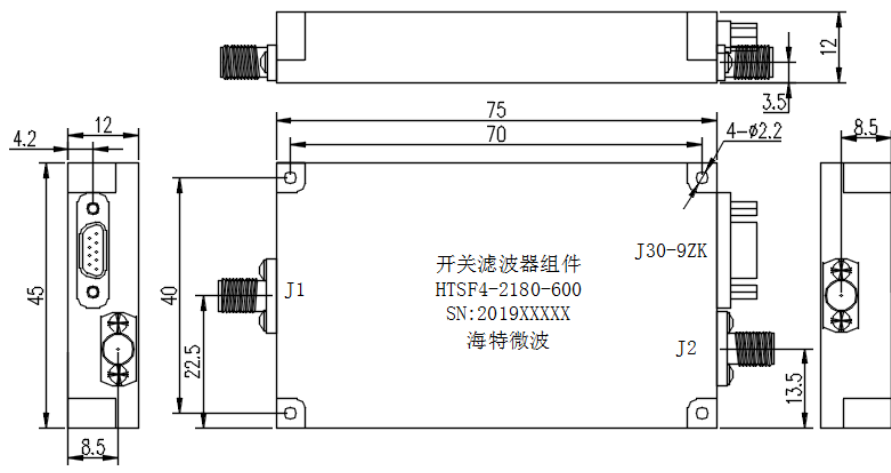


产品规格书

产品名称	开关滤波器组件		规格型号	HTSF4-2180-600															
技术指标	1	工作频率	1880~2030MHz&2030~2180MHz&2180~2330MHz&2330~2480MHz（四路）																
	2	插入损耗	≤6dB																
	3	带内波动	≤1dB																
	4	矩形系数	$BW_{-75dB}/150MHz \leq 3$																
	5	驻波	≤1.8																
电源及控制	1	电源	+5V/-5V																
	2	控制	C1/C2 两位 TTL 电平																
接口形式	1	射频接口	可拆卸式 SMA-K，插针Φ0.5mm																
	2	控制及电源	J30J-9ZKP 1—+5V，2—+5V，4—-5V，5—-5V， 6—C1，7—C2，其余—GND																
外形尺寸	 <p>表面处理：本色导电氧化 产品标识：刻字，宋体，字高 3mm</p>																		
温度环境	1	工作温度	-40~+70℃																
	2	存储温度	-55~+85℃																
真值表	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>C1</th> <th>C2</th> <th>工作频率</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td>1880~2030MHz</td> </tr> <tr> <td>0</td> <td>1</td> <td>2030~2180MHz</td> </tr> <tr> <td>1</td> <td>0</td> <td>2180~2330MHz</td> </tr> <tr> <td>1</td> <td>1</td> <td>2330~2480MHz</td> </tr> </tbody> </table>				C1	C2	工作频率	0	0	1880~2030MHz	0	1	2030~2180MHz	1	0	2180~2330MHz	1	1	2330~2480MHz
C1	C2	工作频率																	
0	0	1880~2030MHz																	
0	1	2030~2180MHz																	
1	0	2180~2330MHz																	
1	1	2330~2480MHz																	