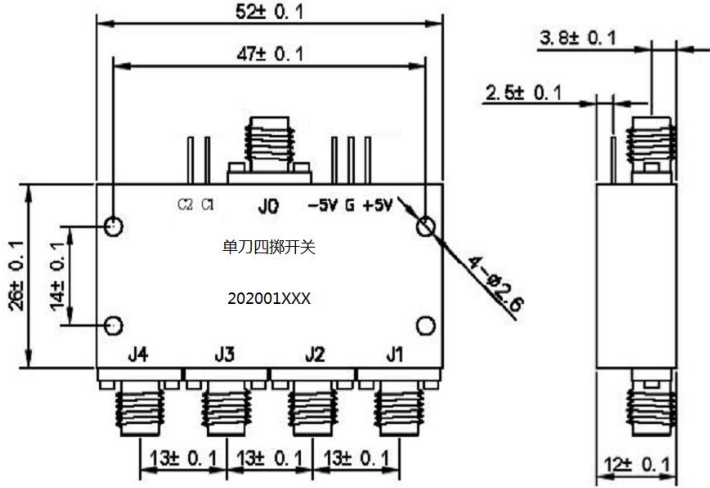


产品规格书

产品名称	单刀四掷开关		规格型号	HTSA4-06183															
技术指标	1	工作频率	6~18GHz																
	2	插入损耗	≤4.0dB																
	3	驻波	≤1.8																
	4	开关隔离	≥60dB																
	5	承受功率	≥25dBm																
	6	开关时间	≤200nS																
	7	工作方式	吸收式																
电源及控制	1	电源	+5V/260mA -5V/100mA																
	2	控制	2 位 TTL 电平																
接口形式	1	射频接口	SMA-K																
	2	控制及电源	绝缘子																
外形尺寸	 <p>表面处理：本色导电氧化 产品标识：刻字，宋体，字高 2mm；</p>																		
温度环境	1	工作温度	-40~+70℃																
	2	存储温度	-55~+85℃																
真值表	<table border="1" data-bbox="414 1630 1093 1854"> <thead> <tr> <th>C2</th> <th>C1</th> <th>功能</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td>J0 与 J1 导通</td> </tr> <tr> <td>0</td> <td>1</td> <td>J0 与 J2 导通</td> </tr> <tr> <td>1</td> <td>0</td> <td>J0 与 J3 导通</td> </tr> <tr> <td>1</td> <td>1</td> <td>J0 与 J4 导通</td> </tr> </tbody> </table>				C2	C1	功能	0	0	J0 与 J1 导通	0	1	J0 与 J2 导通	1	0	J0 与 J3 导通	1	1	J0 与 J4 导通
C2	C1	功能																	
0	0	J0 与 J1 导通																	
0	1	J0 与 J2 导通																	
1	0	J0 与 J3 导通																	
1	1	J0 与 J4 导通																	